



● DISCRETE LEDs - Ø 5mm Ultra-Violet

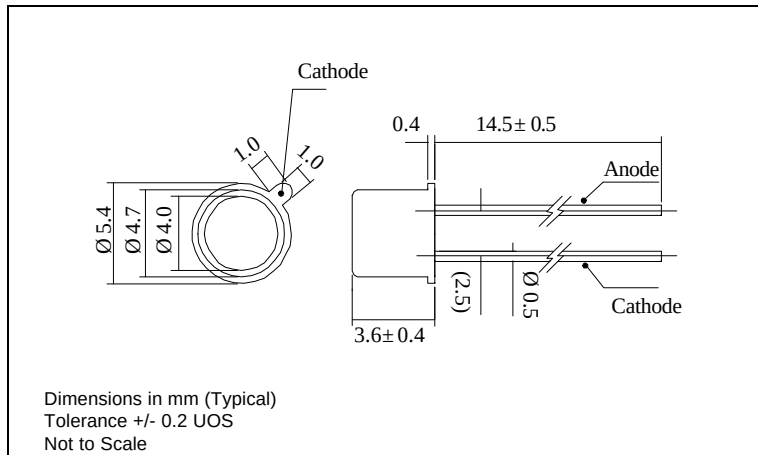

- Wide viewing angle
- 370nm peak wavelength
- Also available in ball lens style (part no 260018)

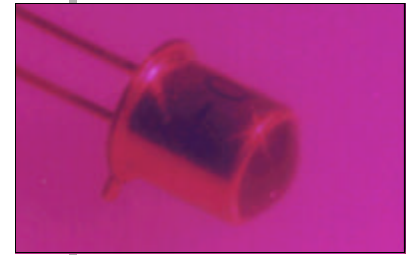

260019 SERIES

MLQ = 50

Ordering Information & Typical Technical Characteristics (Ta = 25°C)

Mean Time Between Failure = 100,000 Hours. * Duty Cycle <=1/10, Pulse Width <= 10msec

PART NUMBER	COLOUR	TYP. FWD VOLTAGE V _f @ I _{opr}	MAX FWD VOLTAGE V _f @ I _{opr}	FORWARD CURRENT I _{opr}	MAX REV CURRENT I _r (V _r =5V)	OPTICAL POWER P _o	SPECTRUM HALF WIDTH Δλ	VIEWING ANGLE 2θ _{1/2}
-------------	--------	---	--	-------------------------------------	--	---------------------------------	---------------------------	------------------------------------

OPTICAL / ELECTRICAL CHARACTERISTICS (T_a = 25°C)

260019	Ultra-Violet	3.9		10	85	1	12	110
UNITS	Water Clear	V	V	mA	μA	mW	nm	deg

PART NUMBER	COLOUR	FORWARD CURRENT I _{opr} max	PEAK FWD CURRENT I _{fp} *	REVERSE VOLTAGE V _r max	POWER DISSIPATION P _d max	PEAK WAVELENGTH Typ. λ _p	OPERATING TEMP T _{opr}	STORAGE TEMP T _{stg}
-------------	--------	---	---------------------------------------	---------------------------------------	---	--	------------------------------------	----------------------------------

ABSOLUTE MAXIMUM RATINGS (T_a = 25°C)

260019	Ultra-Violet	15	30		60	370	-30 to +80	-40 to +100
UNITS	Water Clear	mA	mA	Vdc	mW	nm	°C	°C

PRECAUTIONS FOR HANDLING ELECTROSTATIC SENSITIVE LEDs

Static Electricity and Surge

Static electricity and surge will damage the LED and a high standard of care must be taken during handling. It is recommended that a wristband, conductive mat or anti-electrostatic glove is used when handling the LEDs. All devices, equipment (e.g. soldering iron points) and machinery must be properly grounded.



SAFETY PRECAUTIONS FOR HANDLING HIGH BRIGHTNESS LEDs

Invisible Laser Radiation : Avoid direct eye exposure to UV light

Please refer to European Standard BSEN 100015-1 1992 for further information.

© Optosource 2000

● Datasheet Reference 30/99 Issue 02

Optosource • Fax: +44 (0)1229 580012 • email: sales@optosource.com • website: www.optosource.com • Telephone +44 (0)1229 484623

Optosource is a division of Marl International Limited, experts in LED technology since 1972.

The information contained in this datasheet does not constitute part of any order or contract and should not be regarded as a representation relating to either products or service. Marl International reserve the right to alter without notice the specification or any conditions of supply for products or service.